



DIGISOL®

FTTH SOLUTIONS



Manufacturing Since 1986

DIGISOL XPON ONU Router with 1 PON and 1 Gigabit LAN Port

DG-GR6010



Key Features:-

- Dual mode ONU
- Support Bridge mode / Routing Mode
- Support from DDOS attacks

Introduction:-

DIGISOL DG-GR6010 is a Dual Mode Routing ONU modem designed for fulfilling FTTH ultra-broadband access request of home and SOHO users. It supports NAT/Firewall functions. It is based on the stable and mature EPON/GPON technology, which has high performance to price ratio. It is highly reliable and easy to maintain, with guaranteed QoS and fully compliant to IEEE 802.3ah EPON and ITU-T G.984.x GPON standard.

Technical Specifications:-

PON

- 1 XPON port (EPON PX20+ and GPON Class B+)
- Wavelength : TX 1310nm and RX 1490nm
- SC/UPC Connector
- Receiving Saturation : ≥ -8 dBm
- Receiving Sensitivity : ≤ -28 dBm
- Transmitting Optical Power : 0 to 4 dBm
- Transmitting Distance : 20 Km

Interface Type

- 1 x 10/100/1000Mbps auto adaptive Ethernet interfaces
- Full/Half Duplex, RJ45 connector

Indicators

- 3, For SYS, LINK/ACT, REG

Basic

- Support MPCP discover®ister
- Support authentication Mac/Loid/Mac+Loid
- Support Triple Churning
- Support DBA bandwidth
- Support auto-detecting, auto-configuration and auto firmware upgrade.
- Support authentication SN/Psw/Loid/Loid+Psw

Alarm

- Support Dying Gasp

- Support PortLoopDetect
- Support Eth Port Los

VLAN

- Support VLAN tag mode
- Support VLAN transparent mode
- Support VLAN trunk mode (max 8 vlans)
- Support VLAN 1:1 translation mode (max 8 vlans)

Multicast

- Support IGMPv1/v2
- Support IGMP Snooping
- Max Multicast vlan 8
- Max Multicast Group 64



DIGISOL®

FTTH SOLUTIONS



Manufacturing Since 1986

DIGISOL XPON ONU Router with 1 PON and 1 Gigabit LAN Port

Technical Specifications:-

QoS

- Support 4 queues
- Support SP and WRR
- Support 802.1P

L3

- Support Ipv4
- Support DHCP/PPPOE/Static IP
- Support Static route
- Support NAT

Management

- Support CTC OAM 2.0 and 2.1
- Support ITUT984.x OMCI
- Support WEB
- Support TELNET
- Support CLI

DC Power Supply

- DC 12V / 0.5A, external AC-DC power adapter

Power consumption

- ≤4W

Operating temperature

- -30°C ~ +70°C

Operating humidity

- 10% ~ 90% (non-condensing)

Storing temperature

- -30°C ~ +70°C

Storing humidity

- 10% ~ 90% (non-condensing)

Dimensions

- 82mm x 82mm x 25mm (LxWxH)

Net Weight


- 85g

Ordering Information:-

DG-GR6010: DIGISOL XPON ONU Router with 1 PON and 1 Gigabit LAN Port

*Warranty shall be subject to terms and conditions specified in the DIGISOL PRODUCT WARRANTY displayed on the website of the company.

DIGISOL Logos are trademarks and/or registered trademarks of DIGISOL SYSTEMS LIMITED. Other trademarks, product, service and company names mentioned are the property of their respective owners. Information is subject to change without notice. The actual product appearance may differ from the one shown here. © 2022 DIGISOL SYSTEMS LIMITED. All rights reserved.

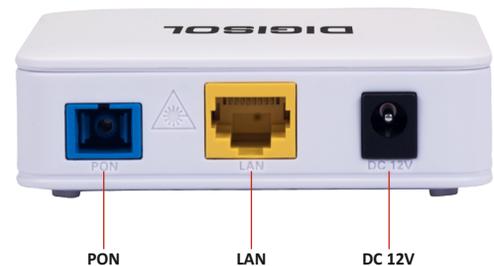

DIGISOL SYSTEMS LIMITED

215 Atrium Bldg., 305, A-Wing, 3rd Floor, Opp. Big Cinema, Courtyard Marriott Compound, Andheri-Kurla Road, Andheri (E), Mumbai - 400093.



1800-209-3444



www.digisol.com



helpdesk@digisol.com



@DIGISOLINDIA

*Made In India products are available in specific part codes, please contact Digisol Sales Representative / Authorised Distributor for delivery schedule.